

Product Data Sheet

SYLVATAC[®] RE 5S

SYLVATAC[®] RE 5S is a liquid rosin ester that combines broad compatibility to the flooring and construction applications.

FEATURES


- Medium viscosity
- Medium volatiles

APPLICATIONS

- Flooring adhesives

PROPERTIES	SPECIFICATIONS
Acid value, mgKOH/g	20 max
Viscosity @ 40°C, mPa.s	6000 max
Colour (1:1 in Toluene), Gardner	10 max
	TYPICAL VALUES
Volatiles content, %	5

SYLVATAC[®] RE5S - Temperature Viscosity Profile

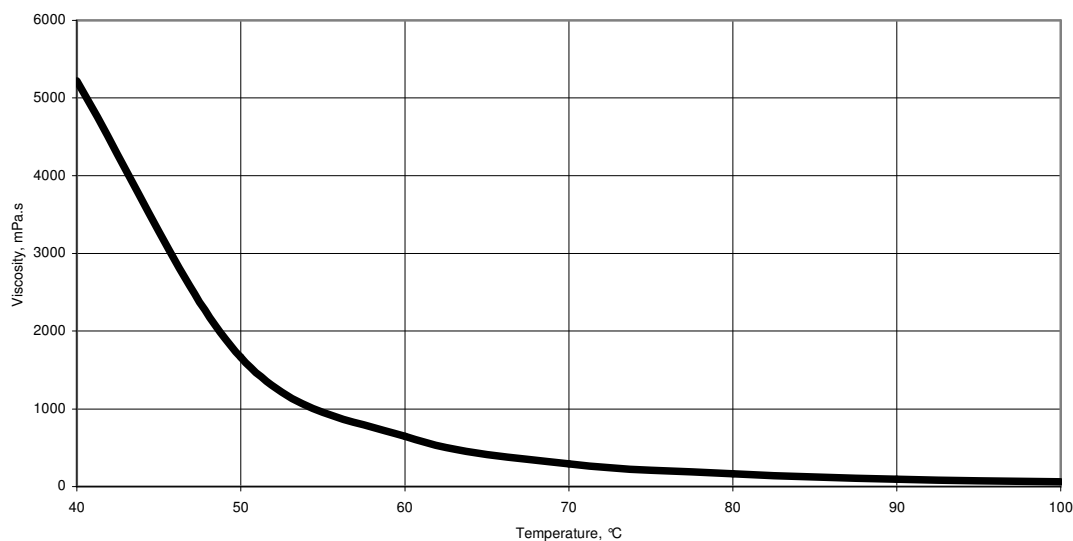

Arizona Chemical, PO Box 60053, 1320 AB Almere, The Netherlands
Telephone +31 36 546 2800 Telefax +31 36 546 2811 Web www.arizonachemical.com

Revision July 2009

The information and statements herein are believed to be reliable, but are not to be construed as a warranty or representation for which we assume legal responsibility. Users should undertake sufficient verification.



Product Data Sheet

SHIPPING CLASSIFICATION	Non-hazardous.
CN CODE	3806.3000
PACKAGING	SYLVATAC® RE5S is available in 200 kg open head steel drums
FDA STATUS	SYLVATAC® RE 5S meets the requirements of the Code of Federal Regulations, Title 21 under the following section: 175.105 Adhesives
HEALTH & SAFETY	For handling and processing precautions, please consult the corresponding Material Safety Data Sheet.



Arizona Chemical, PO Box 60053, 1320 AB Almere, The Netherlands
Telephone +31 36 546 2800 Telefax +31 36 546 2811 Web www.arizonachemical.com

Revision July 2009

The information and statements herein are believed to be reliable, but are not to be construed as a warranty or representation for which we assume legal responsibility. Users should undertake sufficient verification.