



# Product Data Sheet

## UNI-REZ<sup>®</sup> 2624

### HOT MELT POLYAMIDE ADHESIVE

#### FEATURES

- Heat resistance
- Fast set
- Moderate flexibility
- Chemical and grease resistance
- FDA approval 175.105

#### APPLICATIONS

- Packaging
- Converting
- Bonding preheated metals

PROPERTIES	SPECIFICATIONS
<b>Softening Point</b> , °C, Ring & Ball, ASTM E 28	155-170
<b>Viscosity</b> , LVT Brookfield, Spindle # 31, cps/mPa·s at 190°C, ASTM D 3236	6000-10000
<b>Color</b> , 40% in n-Butanol, Gardner	7 Maximum
	TYPICAL VALUES
<b>Acid Value</b> , mg KOH/g	6.5
<b>Amine Value</b> , mg KOH/g	0.6
<b>Color</b> , 40% in n-Butanol, Gardner	5+
<b>Tensile Strength</b> , psi (MPa), ASTM D 1708	1200 (8.3)
<b>Elongation</b> , %, ASTM D-1708	400
<b>Tensile Modulus</b> , psi (MPa), ASTM D 638	26000 (179)
<b>Mandrel Bend Flexibility</b> , (1" diameter), pass, °C, ASTM D 3111	-20
<b>Open Time</b> , sec., 10 mil film, ASTM D 4497	<5
<b>Shear Adhesion Failure Temperature (SAFT)</b> , 1 kg. wt. °C, ASTM D 4498	150
<b>Water Absorption</b> , ASTM D-570: after 24 hours, % after 7 days, %	0.2 0.5
<b>Pounds per Gallon</b> , (g/cc), 25°C	8.0 (0.96)
<b>Flash Point</b> , °C, COC	271 (520°F)




Technical Service: Savannah, GA (912) 238-6556  
Sales Service: Jacksonville, FL - (800) 733-1374

The information and statements herein are believed to be reliable, but are not to be construed as a warranty or representation for which we assume legal responsibility. Users should undertake sufficient verification and testing to determine the suitability for their own particular purpose of any information or products referred to herein. NO WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE IS MADE. Nothing herein is to be taken as permission, inducement or recommendation to practice any patented invention without a license.



# Product Data Sheet

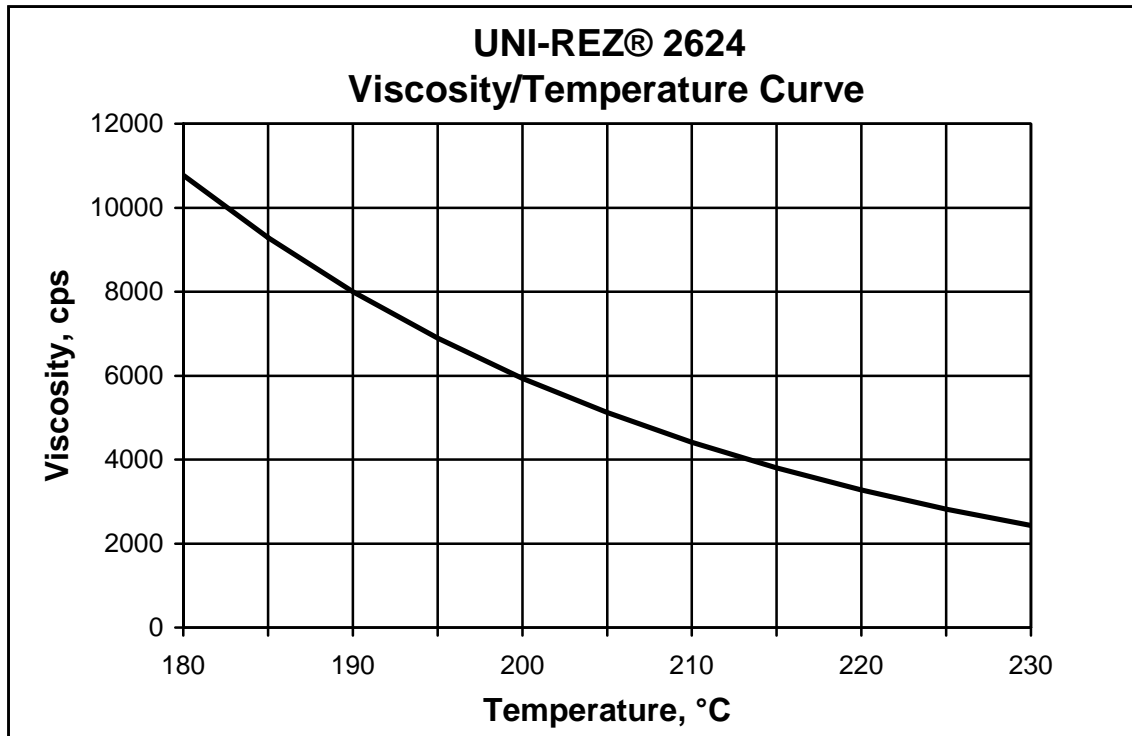

<b>Hot Melt Stability:</b>	Molten <b>UNI-REZ® 2624</b> may be exposed to air for up to 1 hour at 210°C (410°F) or 2 hours at 190°C (374°F) without skin formation or significant viscosity increase. A nitrogen blanket is essential for longer melt pot residence times.
<b>Handling and storage:</b>	<b>UNI-REZ® 2624</b> will slowly absorb moisture from the air, which may cause foaming when the resin is melted and may result in inadequate bonds. Partially used containers should be closed tightly or the remaining resin should be transferred into an airtight container and kept in a cool, dry area.
<b>FDA Status:</b>	<b>UNI-REZ® 2624</b> meets the ingredient requirements of the following section of the Code of Federal Regulations, Title 21 when used according to the regulations and any limitations that may apply: <p style="text-align: center;">175.105 Adhesives</p>
<b>TSCA Status:</b>	<b>UNI-REZ® 2624</b> is listed on the TSCA inventory.
<b>DOT Shipping Classification:</b>	Non-hazardous.
<b>Shipping:</b>	<b>UNI-REZ® 2624</b> is available in pellet form, packaged in poly-foil lined multi-wall bags, 50 lb. net.

9/03



**Technical Service:** Savannah, GA (912) 238-6556  
**Sales Service:** Jacksonville, FL - (800) 733-1374

The information and statements herein are believed to be reliable, but are not to be construed as a warranty or representation for which we assume legal responsibility. Users should undertake sufficient verification and testing to determine the suitability for their own particular purpose of any information or products referred to herein. NO WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE IS MADE. Nothing herein is to be taken as permission, inducement or recommendation to practice any patented invention without a license.