



# Product Data Sheet

## UNI-REZ<sup>®</sup> 2633

### HOT MELT POLYAMIDE ADHESIVE

#### FEATURES

- Excellent high / low temperature cycling
- Moderate to long open time
- Good chemical and grease resistance
- Excellent adhesion to plastics including plasticized PVC
- Non-yellowing
- FDA approval 175.105

#### APPLICATIONS

- Multipurpose assembly
- Woodworking
- Packaging
- Converting

PROPERTIES	SPECIFICATIONS
<b>Softening Point</b> , °C, Ring & Ball, ASTM E 28	127-137
<b>Viscosity</b> , LVT Brookfield, Spindle # 31, cps/mPa·s at 190°C, ASTM D 3236	4500-8000
<b>Color</b> , 40% in n-Butanol, Gardner	7 Maximum
	TYPICAL VALUES
<b>Acid Value</b> , mg KOH/g	0.8
<b>Amine Value</b> , mg KOH/g	7.0
<b>Color</b> , 40% in n-Butanol, Gardner	5
<b>Tensile Strength</b> , psi (MPa), ASTM D 1708	250 (1.8)
<b>Elongation</b> , %, ASTM D-1708	300
<b>Tensile Modulus</b> , psi (MPa), ASTM D 638	3100 (21)
<b>Peel Strength</b> , pli (N/25mm), plasticized PVC to itself, ASTM D 1876	30 (131)
<b>Mandrel Bend Flexibility</b> (1" diameter), pass, °C, ASTM D 3111	-30
<b>Open Time</b> , sec., 10 mil film, ASTM D 4497	30
<b>Shear Adhesion Failure Temperature (SAFT)</b> , 1 kg. wt. °C, ASTM D 4498	115
<b>Water Absorption</b> , ASTM D-570: after 24 hours, % after 7 days, %	0.7 1.9
<b>Pounds per Gallon</b> , (g/cc), 25°C	8.1 (0.97)
<b>Flash Point</b> , °C, COC	271 (520°F)




Technical Service: Savannah, GA (912) 238-6556  
Sales Service: Jacksonville, FL - (800) 733-1374

The information and statements herein are believed to be reliable, but are not to be construed as a warranty or representation for which we assume legal responsibility. Users should undertake sufficient verification and testing to determine the suitability for their own particular purpose of any information or products referred to herein. NO WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE IS MADE. Nothing herein is to be taken as permission, inducement or recommendation to practice any patented invention without a license.



# Product Data Sheet

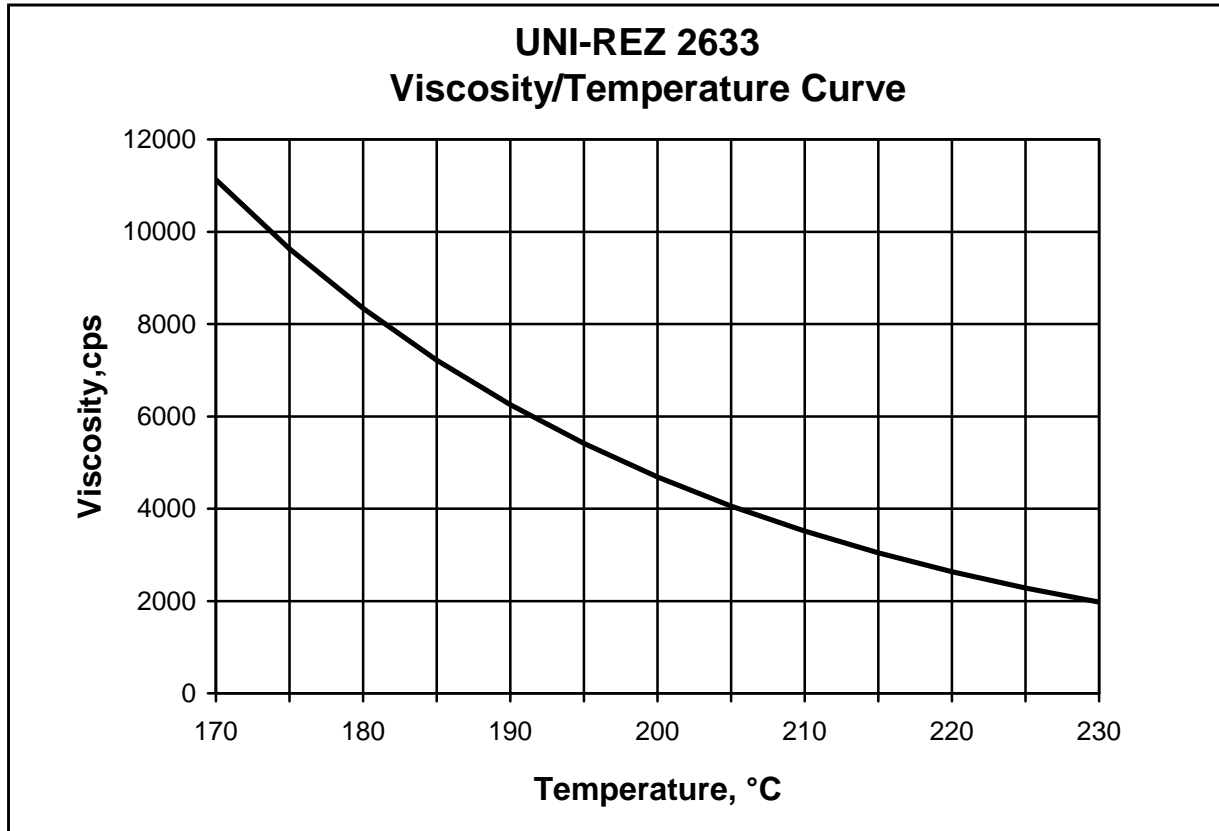

<b>Hot Melt Stability:</b>	Molten <b>UNI-REZ 2633</b> may be exposed to air for up to 3 hours at 210°C (410°F) or 9 hours at 190°C (374°F) without skin formation or significant viscosity increase. A nitrogen blanket is essential for longer melt pot residence times.
<b>Handling and storage:</b>	<b>UNI-REZ 2633</b> will slowly absorb moisture from the air, which may cause foaming when the resin is melted and may result in inadequate bonds. Partially used containers should be closed tightly or the remaining resin should be transferred into an airtight container and kept in a cool, dry area.
<b>FDA Status:</b>	<b>UNI-REZ 2633</b> meets the ingredient requirements of the following section of the Code of Federal Regulations, Title 21 when used according to the regulations and any limitations that may apply: 175.105 Adhesives
<b>TSCA Status:</b>	<b>UNI-REZ 2633</b> is listed on the TSCA inventory.
<b>DOT Shipping Classification:</b>	Non-hazardous.
<b>Shipping:</b>	<b>UNI-REZ 2633</b> is available in pellet form, packaged in poly-foil lined multi-wall bags, 50 lb. net.

9/03



**Technical Service:** Savannah, GA (912) 238-6556  
**Sales Service:** Jacksonville, FL - (800) 733-1374

The information and statements herein are believed to be reliable, but are not to be construed as a warranty or representation for which we assume legal responsibility. Users should undertake sufficient verification and testing to determine the suitability for their own particular purpose of any information or products referred to herein. NO WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE IS MADE. Nothing herein is to be taken as permission, inducement or recommendation to practice any patented invention without a license.