



Product Data Sheet

UNI-REZ[®] 2636

HOT MELT POLYAMIDE ADHESIVE

FEATURES

- Low temperature flexibility
- Moderate to long open time
- Good hot melt stability
- Excellent adhesion to plastic and plasticized PVC
- Excellent high / low temperature cycling
- Non-yellowing
- FDA approval 175.105

APPLICATIONS

- Woodworking
- Multipurpose assembly
- Packaging
- Bonding preheated metals

PROPERTIES	SPECIFICATIONS
Softening Point , °C, Ring & Ball, ASTM E 28	127-137
Viscosity , LVT Brookfield, Spindle # 31, cps/mPa-s at 190°C, ASTM D 3236	4500-8000
Color , 40% in n-Butanol, Gardner	7 Maximum
	TYPICAL VALUES
Acid Value , mg KOH/g	0.7
Amine Value , mg KOH/g	6.5
Color , 40% in n-Butanol, Gardner	5
Tensile Strength , psi (MPa), ASTM D 1708	300 (2.1)
Elongation , %, ASTM D-1708	350
Tensile Modulus , psi (MPa), ASTM D 638	4000 (28)
Peel Strength , pli (N/25mm), plasticized PVC to itself, ASTM D 1876	25 (110)
Mandrel Bend Flexibility , (1" diameter), pass, °C, ASTM D 3111	-40
Open Time , sec., 10 mil film, ASTM D 4497	45
Shear Adhesion Failure Temperature (SAFT) , 1 kg. wt. °C, ASTM D 4498	120
Water Absorption , ASTM D-570: after 24 hours, % after 7 days, %	0.8 2.2
Pounds per Gallon , (g/cc), 25°C	8.1 (0.97)
Flash Point , °C, COC	271 (520°F)




Technical Service: Savannah, GA (912) 238-6556
Sales Service: Jacksonville, FL - (800) 733-1374

The information and statements herein are believed to be reliable, but are not to be construed as a warranty or representation for which we assume legal responsibility. Users should undertake sufficient verification and testing to determine the suitability for their own particular purpose of any information or products referred to herein. NO WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE IS MADE. Nothing herein is to be taken as permission, inducement or recommendation to practice any patented invention without a license.



Product Data Sheet

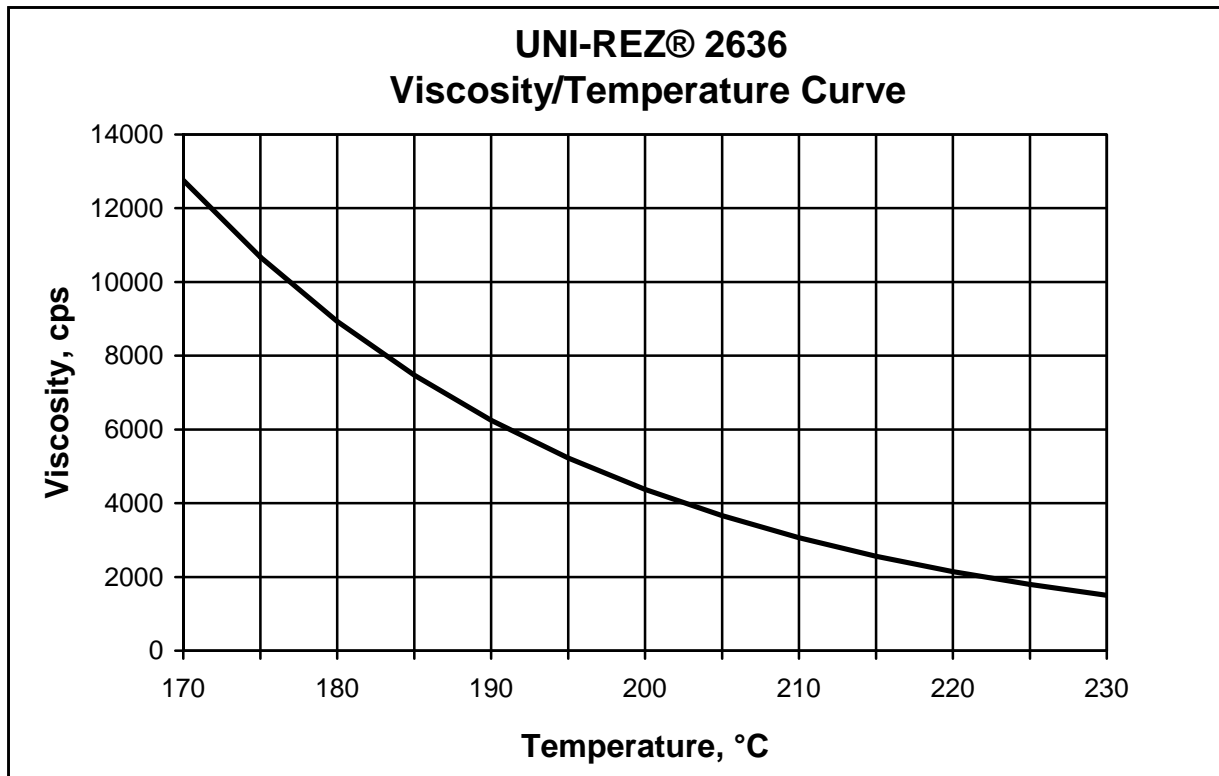

Hot Melt Stability:	Molten UNI-REZ® 2636 may be exposed to air for up to 5 hours at 210°C (410°F) or 12 hours at 190°C (374°F) without skin formation or significant viscosity increase. A nitrogen blanket is essential for longer melt pot residence times.
Handling and storage:	UNI-REZ® 2636 will slowly absorb moisture from the air, which may cause foaming when the resin is melted and may result in inadequate bonds. Partially used containers should be closed tightly or the remaining resin should be transferred into an airtight container and kept in a cool, dry area.
FDA Status:	UNI-REZ® 2636 meets the ingredient requirements of the following section of the Code of Federal Regulations, Title 21 when used according to the regulations and any limitations that may apply: 175.105 Adhesives
TSCA Status:	UNI-REZ® 2636 is listed on the TSCA inventory.
DOT Shipping Classification:	Non-hazardous.
Shipping:	UNI-REZ® 2636 is available in pellet form, packaged in poly-foil lined multi-wall bags, 50 lb. net.

9/03



Technical Service: Savannah, GA (912) 238-6556
Sales Service: Jacksonville, FL - (800) 733-1374

The information and statements herein are believed to be reliable, but are not to be construed as a warranty or representation for which we assume legal responsibility. Users should undertake sufficient verification and testing to determine the suitability for their own particular purpose of any information or products referred to herein. NO WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE IS MADE. Nothing herein is to be taken as permission, inducement or recommendation to practice any patented invention without a license.